


TRITEC

ENERGY FOR A BETTER WORLD

TRI-STAND ROOF HOOK PLUS

Product information

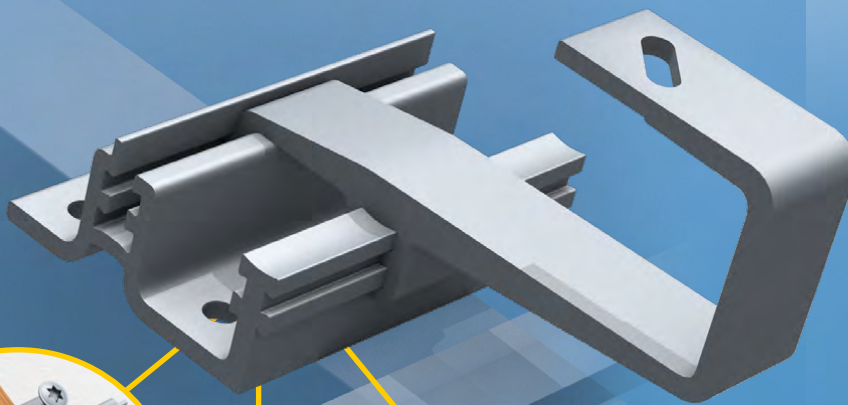

Maximum flexibility:
Plate with 2 x 6 boreholes for M8 flathead-screws for the installation of the roof hook onto the rafter.



Universal possibility of mounting:
Roof hook with diagonal borehole for vertical and horizontal adjustment of the mounting profile.



Quick and easy positioning:
Screwless fixation of the position of the bracket on the plate.

Height adjustable:

The main feature of the roof hook form three base plates, allowing two different height levels each. This makes the TRI-STAND roof hook PLUS available in six different height levels between 28 and 55 mm.

Flexible and easy installation:

Suitable for the roof tiles the bracket gets pushed horizontally into the plate. The two different height levels of the plate allow optimal adaptation to the battens and roof tile thickness. Thanks to the diagonal hole in the bracket, insert and clamping systems can be easily mounted.

Very high load capacity:

up to 200 kg are permitted. Even high snow loads are no longer a problem.

www.tritec-energy.com


TRI-STAND ROOF HOOK PLUS

TRITEC


TRI-STAND PLUS PLATE 40/28

Item No.: 1502983

All Plates
to be used with the
**TRI-STAND ROOF
HOOK PLUS BRACKET**
Item No.: 1502982

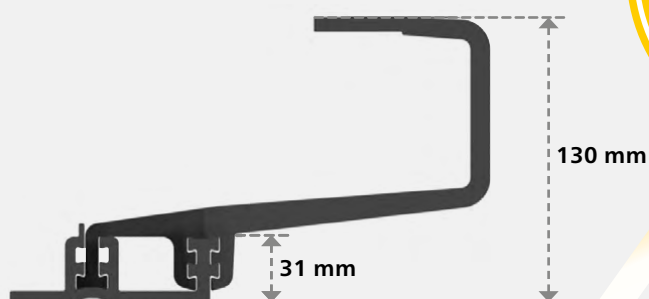


Lower Guide

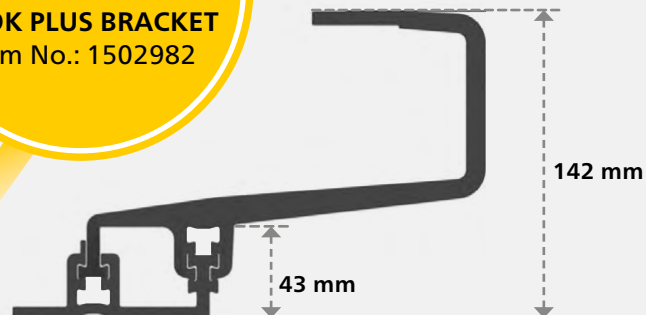


Upper Guide

TRI-STAND PLUS PLATE 49/37

Item No.: 1502984

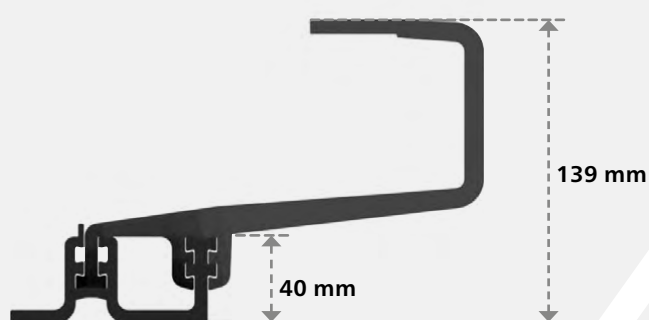


Lower Guide

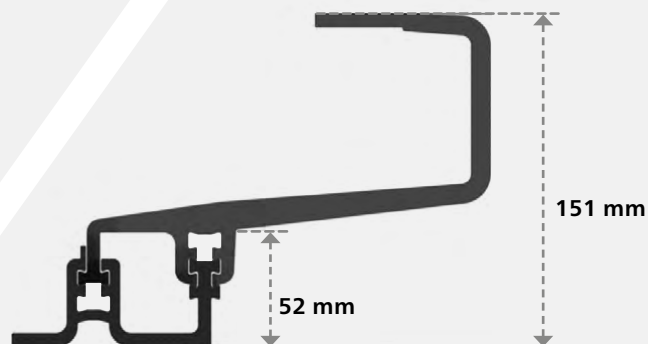


Upper Guide

TRI-STAND PLUS PLATE 55/43

Item No.: 1502985

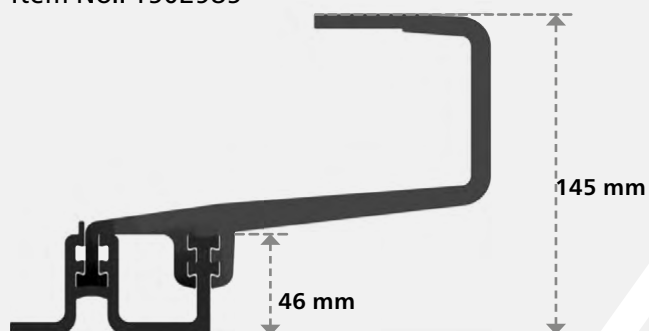

Lower Guide

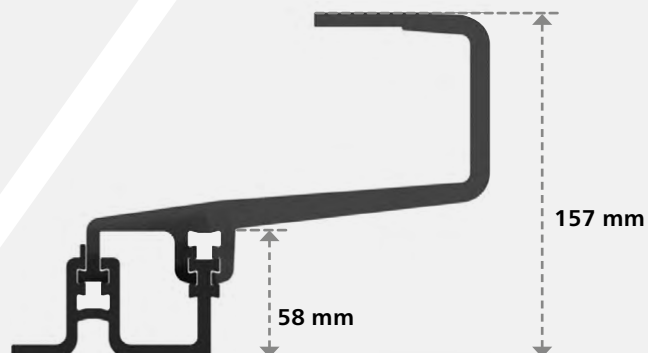

Upper Guide

Further information and the download of the assembly instructions you will find on our homepage www.tritec-energy.com.

Or just talk to us directly. Our experts are at your disposal to answer all your questions.

Contact
info@tritec-energy.com
www.tritec-energy.com